

## X Plus Wall Tops Assembly









Versions:202401

## Top/Back Specifications Packaging Includes 2x Hand Wheels Watermark License 92.5 WM-060073 Temperature Rating Min 1°C-Max 75°C Pressure Rating Min 150kpa - Max 500kpa 65 Finish & SKU Matte Black NR201609MB Brushed Gold NR201609BG \*Dimensions are nominal measurements only.


Nero ———2 X Plus Wall Tops Assembly - Manual

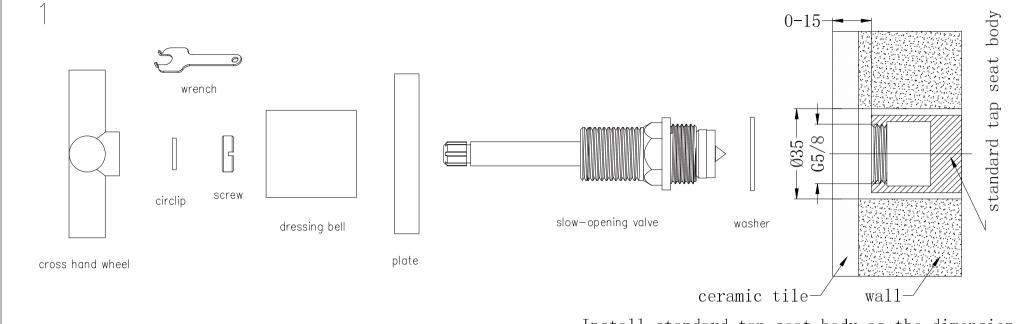


Install standard tap seat body as the dimension.

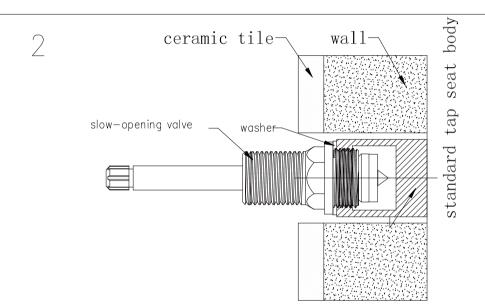


- 1. Put on the washer on the slow-opening valve.
- 2. Screw the slow-opening valve onto the body tightly.

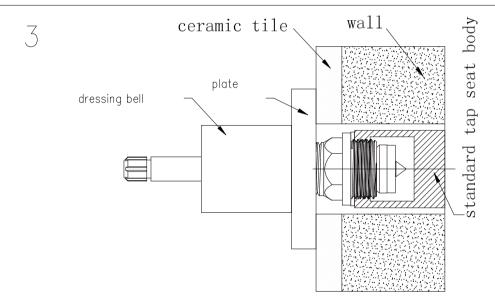

- 1. Put plate onto slow-opening valve.
- 2. Screw dressing bell tightly on the slow-opening valve.

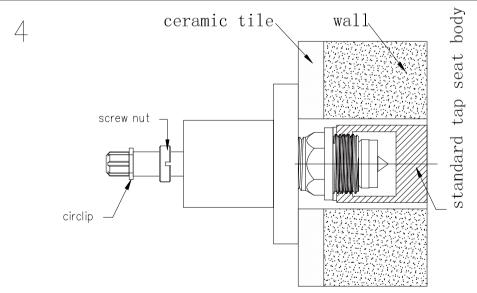

- 1. Put screw onto the stick of slow-opening valve.
- 2. Put circlip onto gap of slow-opening valve.

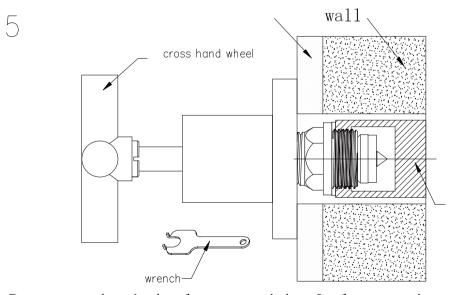

- 1. Put cross hand wheel onto stick of slow-opening valve, then adjust the rotation angle of hand wheel.
- 2. Use wrench to make screw into cross hand wheel, then tighten it up.

## Nero